



Part number SES1836TT

2008-11 Mitsubishi Lancer 4 Cyl.
2.0L, 2.4L
(All Trim Levels)

- 1- Axle back exhaust system
- 1- Grommet hanger (#20089)
- 2- M8X16 Bolts (#6018)
- 2- M10 x 40mm bolts x 1.0 (#6038)
- 2- 10mm flange nuts (#6069)
- 1- Instruction



Congratulations! You have just purchased the best engineered, dyno-proven axle back exhaust system available.

Please check the contents of this box immediately.

Report any defective or missing parts to the Authorized Injen Technology dealer you purchased this product from. Before installing any parts of this system read the instructions thoroughly. If you have any questions regarding installation please contact the dealer you purchased this product from. Installation DOES require some mechanical skills. A qualified mechanic is always recommended.

*Do not attempt to install the intake system while the engine is hot. The installation may require removal of radiator fluid line that may be hot.

Injen Technology offers a limited lifetime warranty to the original purchaser against defects in materials and workmanship. Warranty claims must be handled through the dealer from which the item was purchased.

Injen Technology 244 Pioneer Place Pomona, CA 91768 USA

Please check the contents of this box immediately.

NOTE: All Injen exhaust systems are engineered to comply with the 95dB noise limit law specified by the California Highway Patrol and the Society of Automotive Engineers - Except ones that are designated for "Off-Road Use only".

Every Injen exhaust system is individually designed for a specific application and complies with the requirements of Sections 27150, 27151 & 27200 of the California Vehicle Code and Title 13 of the California code of Regulations, Section 10361, which establishes a noise limit of 95dB for passenger cars.

The age of your exhaust system along with certain engine modifications, such as headers, intake, etc., may also affect its current noise level output.

Please check with your local and state law enforcement agencies for exact regulation requirements.

Note: The installation of this axle back exhaust system does require mechanical skills. Injen strongly recommends that this system be installed by a professional mechanic.

Start the installation by removing a portion of the exhaust system from the rear axle-back.

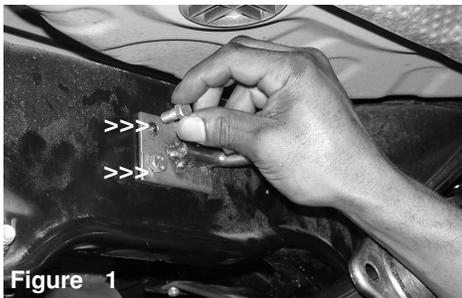


Figure 1
Line up the new plate hanger to the center of the rear axle and use the two m8 bolts.

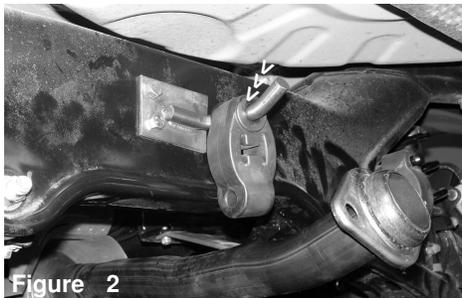


Figure 2
The hanger is installed and one of the unused grommets is re-hung on the hanger.



Figure 3
Raise the axle-back in place and insert the first hanger on the existing rear grommet.



Figure 4
Push the second hanger near the flange into the second grommet as shown above.



Figure 5
align the flange to the stock donut flange and use the stock spring loaded bolts and m10 nuts supplied.



Figure 6
Align the entire axle-back for best fit and tighten the nuts and bolts, keep tip away from the bumper.