



Part number SES1838
2012-2015 Mitsubishi Lancer
2.0/2.4L 4 cyl.
(Excludes AWC models)

1- Axle back exhaust system
2- m10 hex nuts (#6069)

Congratulations! You have just purchased the best engineered, dyno-proven exhaust system available.

Please check the contents of this box immediately.
 Report any defective or missing parts to the Authorized Injen Technology dealer you purchased this product from. Before installing any parts of this system, please read the instructions thoroughly. If you have any questions regarding installation please contact the dealer you purchased this product from.

Installation DOES require some mechanical skills. A qualified mechanic is always recommended.

*Do not attempt to install the intake system while the engine is hot. The installation may require removal of radiator fluid line that may be hot.

Injen Technology offers a limited lifetime warranty to the original purchaser against defects in materials and workmanship. Warranty claims must be handled through the dealer from which the item was purchased.

Injen Technology 244 Pioneer Place Pomona, CA 91768 USA

Please check the contents of this box immediately.
Parts and accessories are available on line at "Injenonline.com"



Figure 1

NOTE: All Injen exhaust systems are engineered to comply with the 95dB noise limit law specified by the California Highway Patrol and the Society of Automotive Engineers - Except ones that are designated for "Off-Road Use only".

Every Injen exhaust system is individually designed for a specific application and complies with the requirements of Sections 27150, 27151 & 27200 of the California Vehicle Code and Title 13 of the California code of Regulations, Section 10361, which establishes a noise limit of 95dB for passenger cars.

The age of your exhaust system along with certain engine modifications, such as headers, intake, etc., may also affect its current noise level output.

Please check with your local and state law enforcement agencies for exact regulation requirements.

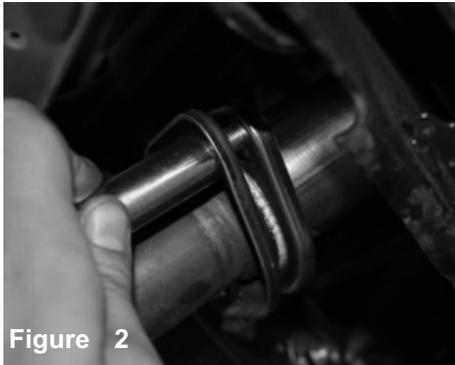


Figure 2

Remove the entire stock exhaust from the axle back. remove the 2 bolts and springs and save for install.



Figure 3

Install the Injen axle back exhaust, and position to the factory flange.



Figure 4

Install and secure the hangars. Secure and tighten using factory springs/bolts. Secure using provided M8 nuts. Tighten and secure the exhaust. Your installation is now complete. Check for clearance and position for best possible fit. Thank you for choosing Injen Technology!