



IMPORTANT WARRANTY & INSTALLATION
INSTRUCTIONS ATTACHED

*Please Forward All Attached Information to Consumer
Warranty Not Valid Unless Returned to CORSA Exhaust*

We ask that you take a few moments to complete our warranty registration form:

TO ACTIVATE YOUR LIMITED LIFETIME WARRANTY GO TO:
CORSAPERFORMANCE.COM/WARRANTY



**For Full-Color Installation Instructions, Please Visit:
CORSAPERFORMANCE.COM and Search by Part Number**

Please be sure to review the enclosed instructions prior to beginning the installation process. If you have any questions about the enclosed parts, instructions or encounter a problem during installation:
CALL CORSA PERFORMANCE TECHNICAL ASSISTANCE AT 800.486.0999

Please take time to read and understand these installation instructions.

CORSA recommends that the installation of this system be performed by a qualified service center or professional muffler installer who has the necessary equipment, tools and experienced personnel. However, if you decide to perform this install, the use of a hoist and an additional person will be required.


WARNING for Base C7 and Grand Sport Auto (Z06 or Grand Sport Manual Excluded): Installation of this system requires a tune to deactivate AFM (4 cylinder mode) and to eliminate the resulting check engine lights that occur when the factory exhaust valves are removed and the wiring is disconnected. The AFM (without the valves) creates a low frequency sound that is loud, choppy, and undesirable.

CAUTION: Never work on a hot exhaust system. Allow time for the vehicle to cool. Always wear eye protection when working under a vehicle.

Recommended Tools:


- 3/8" drive ratchet
- 3/8" drive 10mm deep socket
- 3/8" drive 15mm deep socket
- 3/8" drive 13mm deep socket
- 8mm wrench
- 13mm wrench
- Long extension (10")
- 1/4" drive ratchet
- 1/4" drive 7mm shallow socket
- Grommet pullers
- Soap and water solution
- Torque Wrench
- Screwdriver for License Plate Screws
- Safety glasses

Please confirm that all parts are present before beginning the factory exhaust system removal and CORSA exhaust system installation.

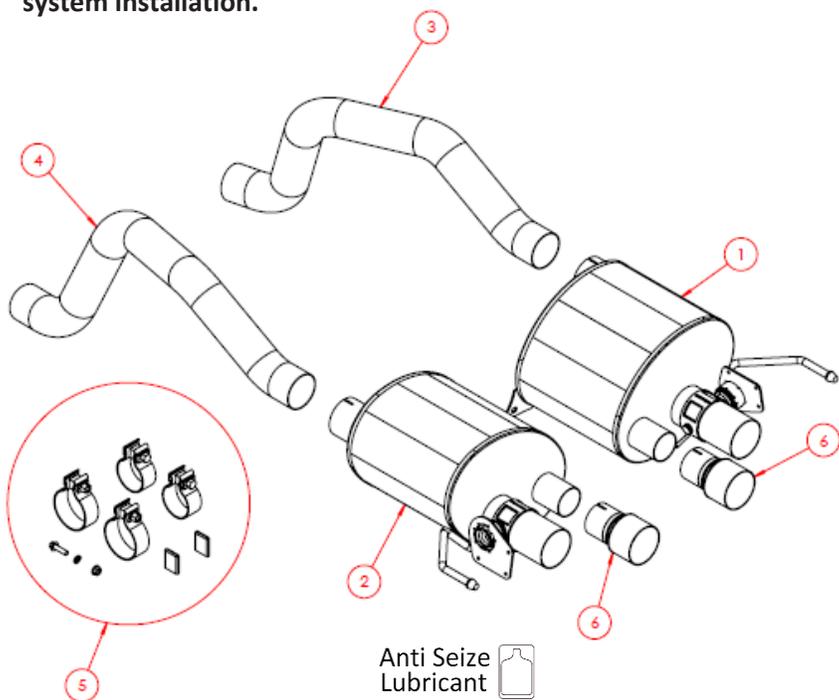

Muffler Section Bill of Materials

1. Passenger Muffler Assembly (with valve): 16CN2018
2. Driver Muffler Assembly (with valve): 16CN2019
3. 16CN4010 – Passenger Axle Pipe (No Valve)
4. 16CN4011 – Driver Axle Pipe (No Valve)
5. 16CN7036 – Hardware Kit
6. 20MU4205 – Tip adapter assembly (2)

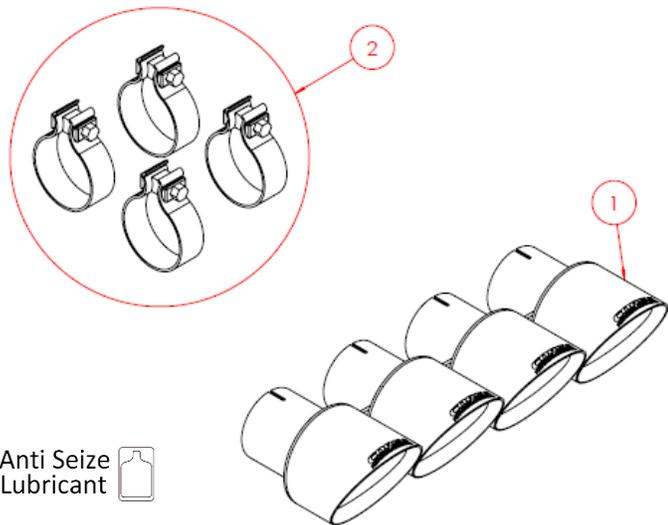

Tip Section Bill of Materials

1. Tip Assembly:
16CN3014 (Quad 4.5" Pro Series Tip Asm for system with NPP style valves)
2. 18DR7033 – Tip Hardware Kit

Factory Exhaust System Removal:

NOTE: This process involves the removal of the lower rear fascia, followed by the removal of the stock axle back components.

1. Remove the two bolts above the tip location using a 10mm socket and 3/8" ratchet. **(Fig. A)**
2. Remove the ten bolts that secure the bottom corners of the lower fascia (5 per side) using a 7mm socket and 1/4" ratchet. **(Fig. B & C)**
3. Remove the two lower mesh inserts on each side of the lower fascia. Each one is snapped in place using six tabs, which can be pushed out from the inside of the fascia. **(Fig. D & E)**
4. Unsnap each lower rear corner of the rear fascia by pushing the end of the tab inwards while pushing the rear fascia up and then backwards. **(Fig. F & G)**
5. Unscrew and remove the license plate to enable access to the two upper center mounting bolts for the rear fascia. **(Fig. H)**

REMOVAL CONTINUES ON NEXT PAGE; REMOVAL PICTURES ON PAGES 5-6 

6. CAREFULLY Remove the two reflectors on each side to enable access to the four outer mounting bolts for the rear fascia. Each reflector is snapped in place using three tabs, which can be pushed out from inside the fascia. **(Fig I)**
 7. Remove the six bolts that secure the top of the lower fascia (2 on each side and 2 in the center) using a 10mm socket and 3/8" ratchet. **(Fig. J & K)**
 8. CAREFULLY unsnap each tab securing the top corner of the rear fascia to remove it from the vehicle. Set the rear fascia aside in a safe location. **(Fig. L, M, & N)**
 9. Remove the two bolts holding the stock mufflers together using a 10mm socket and 3/8" ratchet. **(Fig. O)**
 10. Beginning on the passenger side, remove the two bolts securing the rear muffler grommet with a 13mm socket and 3/8" ratchet. Set aside these bolts to be reused during the installation process. **(Fig. P)**
 11. Disconnect the rear (non-AFM) valve wire. **(Fig. Q)**
 12. Loosen the clamp bolt at the axle pipe inlet using a 15mm socket and a 3/8" ratchet. This will allow the factory exhaust section to droop. **(Fig. R)**
 13. **For Base C7 (Non Z06 Only):** Disconnect the AFM valve wire, then carefully pivot the stock exhaust section down and rearwards to free it from the vehicle. **(Fig. S & T)**
- NOTE FOR AUTOMATIC CARS ONLY:** The shift linkage on the driver side has to be moved to create enough clearance to remove the stock exhaust. This can be done by putting the car in neutral while the driver side is being removed. **(Fig. U)**
14. Repeat steps 10-13 for the driver side stock exhaust section.
 15. Remove the hanger grommet from each rear muffler using grommet pullers or similar device. Set aside both grommets to be reused during the installation process. **(Fig. V)** This concludes the removal process.

Note: The use of a soap and water solution may make working with rubber grommets easier.

REMOVAL PICTURES ON PAGES 5-6 

Factory Exhaust Removal Pictures



Fig. A



Fig. B



Fig. C



Fig. D



Fig. E



Fig. F



Fig. G



Fig. H



Fig. I



Fig. J



Fig. K



Fig. L

REMOVAL PICTURES CONTINUED ON NEXT PAGE 

Factory Exhaust Removal Pictures



Fig. M



Fig. N



Fig. O



Fig. P



Fig. Q



Fig. R



Fig. S



Fig. T



Fig. U

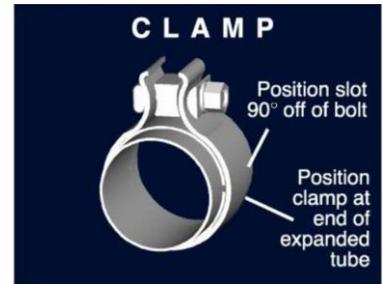


Fig. V

Installation of CORSA Exhaust System:

NOTE: Apply the anti-seize lubricant (supplied) to the threads **ONLY** of all the clamps. Failure to follow this procedure can cause nuts to seize on clamps and potentially destroy threads. After applying anti-seize lubricant, be sure to thoroughly clean your hands, as lubricant will tarnish stainless steel. All clamps should be tightened using a properly calibrated Torque Wrench. Using an air impact gun will damage the clamp and reduce its ability to effectively seal the joint. It may also cause the joint to separate, thereby causing damage to your exhaust system and to your vehicle.

NOTE: Align all clamps so that the center of the clamp bolt is 90 degrees from the notch in the pipe. (See Fig. CLAMP)



1. **For Base C7 (Non-Z06):** Tuck each of the AFM valve wires (front valve on NPP cars) up into the chassis near the back of the transmission. They will no longer be needed. Secure with a zip tie or equivalent. **(Fig. A)**
2. Locate the driver and passenger valve delete axle pipes. Install each axle pipe into the chassis as shown. Slide the axle pipe inlets into the x-pipe section. Rotate the axle pipes until they are centered between the chassis and the transmission components, then snug the clamps at the x-pipe outlet using a 15mm socket and a 3/8" ratchet, leaving them loose enough for further adjustment. **(Fig. B & C)**
3. Reinstall each of the rear muffler hanger grommets as shown using a 13mm socket and a 3/8" ratchet. **(Fig. D)**

NOTE: The passenger side muffler needs to be installed first, as the passenger side tie bracket sits further forward in the vehicle. The passenger side tie bracket will sit in front of the driver side bracket when installed.

4. Locate the passenger side rear muffler assembly, and one of the 2.75" clamps. While holding the assembly with the muffler case seam pointed up as shown, position one of the 2.75" clamps such that the clamp bolt is to the bracket side (inside of muffler) and the nut is towards the ground. **(Fig. E)**
5. Install the factory valve control unit onto the muffler outlet valve using an 8mm socket and 1/4" ratchet. **(Fig. F)**
6. Insert the passenger side hanger into the rubber grommet as shown, then slide the expansion on the muffler inlet over the outlet of the clamp on elbow. Secure the clamp with the 15mm socket and 3/8" ratchet, and a long extension, leaving it loose enough for further adjustment. **(Fig. G, H & I)**

Note: The use of a soap and water solution may make working with rubber grommets easier.

INSTALL CONTINUES ON NEXT PAGE; INSTALL PICTURES ON PAGES 10-13 

7. Repeat Steps 8, 9, & 10 on the driver side of the vehicle. Both of the mufflers will still be free to rotate and move at this point, as the muffler tie brackets are not yet connected. **(Fig. J)**
 8. Locate the tie bracket hardware: 1 M8 flange bolts, 1 lock washer, and the M8 serrated flange nut. Pre assemble the lock washer onto the M8 flange bolt as shown. **(Fig. K)**
- NOTE: The lock washer must go on the flange bolt side to function properly. The serrations on the flange nut will provide the locking feature on the opposite side.**
9. Rotate the rear mufflers upwards until the hole sets align in the muffler tie brackets. Load the M8 flange bolt and lock washer in from the front. Hand tighten the M8 flange nut onto the opposite side tie bracket as shown to finish the connection. Make sure the hardware is left loose at this time to enable movement of the mufflers. **(Fig. L)**
 10. Reconnect the wire to each of the NPP valves as shown, by running the wire over each of the exhaust hangers. Secure the connection by pushing in the locking tab. **(Fig. M & N)**
 11. Locate both tip adapters, and the tip assembly, two 2.25" clamps, and four 3" clamps. Position each of the 2.25" clamps over the adapter inlets such that the clamp bolt is down and facing down on opposite sides of each adapter. Position each of the 3" clamps such that the clamp bolt is down and positioned on the outside part of each side of the tip assembly. Slide the tip adapters into the tip assembly as shown. **DO NOT TIGHTEN AT THIS TIME. (Fig. O, P, & Q)**
 12. Install the tip assembly onto the valve outlet pipes from each muffler as shown, then slide each of the tip adapters onto the inner muffler outlet pipes. Ensure there is enough overlap at each connection such that no gaps are visible through the notches in the pipes. If necessary, a pry bar can be used to push the muffler cases further apart to facilitate the install of the tip assembly or the tip adapters onto the rear mufflers. **(Fig. R, S, & T)**
 13. Verify that the front to back position of the exhaust tips is correct by measuring from each mounting tab for the rear valence to the top edge of the tips. The distance should be approximately 5 ¼- 5 ½ inches. Try to get both measurements to be the same, as this will square up the tip assembly to the rear of the vehicle. Adjustments can be made at both the tip inlet and the muffler inlets to set the depth of the tips. **(Fig. U & V)**
 14. Once the tips are in the correct location, snugly tighten each of the clamps using a 15mm socket and 3/8" ratchet. Start with the outer tip pipe to valve pipe connection on both sides, followed by each end of both inner tip adapter pipes. **(Fig. W, X, & Y)**
 15. Tighten the muffler tie bracket hardware at this time using a 13mm wrench, along with a 13mm socket and 3/8" ratchet. Torque to 15 Ft-Lbs. **(Fig. Z)**

INSTALL CONTINUES ON NEXT PAGE; INSTALL PICTURES ON PAGES 10-13



16. Locate the two protective vinyl sleeves. Install each vinyl sleeve onto the stock mounting tabs on the factory rear valence as shown to protect the tips while the rear valence is being reinstalled. **(Fig. AA & BB)**
17. Reinstall the rear fascia onto the vehicle. CAREFULLY slide the protected mounting tabs over the CORSA tip assembly, and then align each of the locating tabs along the top edge of the rear fascia. Snap the two corner tabs into place. **(Fig. CC, DD, EE & FF)**
18. Verify at this time that the exhaust tips are centered within the tip cutout, and that the tips have an equal amount of reveal on each side. Make any adjustments as necessary by removing the rear valence and repositioning the exhaust until the desired fit is achieved. Adjust the system accordingly to maximize chassis clearance while positioning the tip assembly within the bumper valence. Verify that the valved axle pipe assemblies are not contacting anything within the chassis. Starting at the front and working backwards, tighten the clamps to 45ft-lb using the torque wrench and 15mm socket, ensuring that the tips are still in the desired position.
19. Reinstall the six bolts that secure the top of the lower fascia (2 on each side & 2 in the center) using a 10mm socket and 3/8" ratchet. **(Fig. GG & HH)**
20. Remove the protective vinyl sleeves at this time using a small screwdriver or pry tool, then reinstall the two bolts above the tip location using a 10mm socket and 3/8" ratchet. **(Fig. II)**
21. Reinstall the ten bolts that secure the bottom corners of the lower fascia (5 per side) using a 7mm socket and 1/4" ratchet. **(Fig. JJ & KK)**
22. Reinstall the license plate. **(Fig. LL)**
23. Reinstall the two reflectors on each side by snapping them back in place. **(Fig. MM)**
24. Reinstall the two lower mesh inserts on each side by snapping them back in place. It is easier to snap the inner tabs in place before the outer tabs. Installation complete. **(Fig. NN)**

IMPORTANT NOTE DO NOT over-tighten the clamps on the tip assembly, as this will make future removal of the tip assembly much more difficult. The C7 CORSA tip assemblies are designed to be interchangeable between the different tip finishes.

NOTE: During cold weather start-ups, you may experience an exhaust sound that is deeper and louder in tone than usual. This is temporary and will diminish to normal levels once your engine has reached its normal operating temperature.

NOTE: Immediately following the installation of your exhaust system, you may experience a trace of smoke after initial start-up. DO NOT be alarmed. The smoke is caused by the burning of a small amount of forming oil residue used in the manufacturing process.

INSTALL PICTURES ON PAGES 10-13 

CORSA Exhaust Installation Pictures:



Fig. A



Fig. B



Fig. C



Fig. D



Fig. E



Fig. F



Fig. G



Fig. H



Fig. I



Fig. J



Fig. K



Fig. L

INSTALL PICTURES CONTINUED ON NEXT PAGE 

CORSA Exhaust Installation Pictures:



Fig. M



Fig. N



Fig. O



Fig. P



Fig. Q



Fig. R



Fig. S



Fig. T



Fig. U



Fig. V



Fig. W



Fig. X

INSTALL PICTURES CONTINUED ON NEXT PAGE 

CORSA Exhaust Installation Pictures:



Fig. Y



Fig. Z



Fig. AA



Fig. BB



Fig. CC



Fig. DD



Fig. EE



Fig. FF



Fig. GG



Fig. HH



Fig. II



Fig. JJ

INSTALL PICTURES CONTINUED ON NEXT PAGE 

CORSA Exhaust Installation Pictures:



Fig. KK



Fig. LL



Fig. MM



Fig. NN