



2015+ VW JETTA 1.8T OR 1.4T EXHAUST INSTALLATION GUIDE

Thank you for your purchase of the **AWE Touring or Track Edition** exhaust system for the **2015+ VW Jetta 1.8T or 1.4T**. For up to the minute fitment information, be sure to visit the VW Jetta section of the [AWE website](#).

As always, AWE Performance Specialists are standing by for any questions, at 215-658-1870, or email us [here](#).

Let's go!

PARTS LIST



INSPECT ALL PARTS PRIOR TO DISASSEMBLY OF VEHICLE; IF DAMAGED OR MISSING, PLEASE CONTACT THE PLACE OF PURCHASE IMMEDIATELY.

TOURING EDITION

- 1 Front section (part A2.5)
- 1 Mid muffler assembly (part UH)
- 1 Over axle tube (part HD)
- 1 Touring 180 Technology™ resonator (part GF)
- 2 90mm exhaust tip (choice of color)
- 4 63.5mm (2.5-inch) AccuSeal clamps
- 2 Hanger lock collar
- 1 Allen wrench

TRACK EDITION

- 1 Inlet adapter (part HB)
- 1 Front section (part A2.5)

- 1 Mid muffler assembly (part UH)
- 1 Over axle tube (part HD)
- 1 Track rear outlet (part GE)
- 2 90mm exhaust tip (choice of color)
- 4 63.5mm (2.5-inch) AccuSeal clamps
- 2 Hanger lock collar
- 1 Allen wrench

Jetta 1.8T Parts Only

- 1 Inlet adapter (part HB)

Jetta 1.4T Parts Only

- 1 Inlet section (part A02)


STEP 1



Always refer to the manufacturer's service manual for precise torque specifications on all OEM fasteners.

To start the removal of the OEM cat back exhaust system, remove the 13mm plastic captive screws located on the rear suspension cover, at **Arrows A** in **Figure 1**. These do not separate from the panel, but freely hang.

Unhook the panel, at **Arrow B** in **Figure 1**, to access the cut area in the next step.

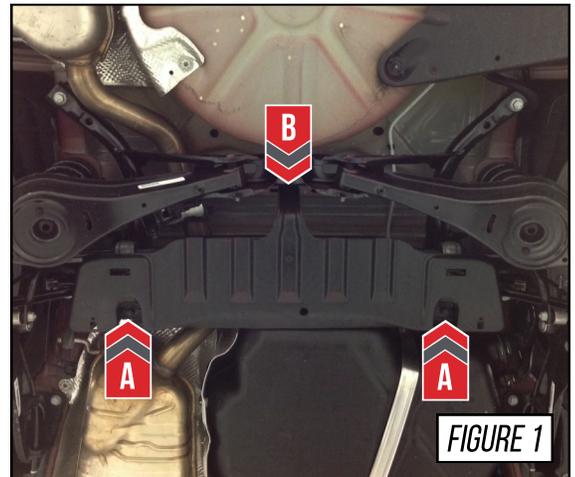


STEP 2

Cut in the grey zone between the arrows in **Figure 2**.



Cutting within this area allows the OEM exhaust to be reinstalled in the future using a factory clamp; part number 1K0 253 141N.

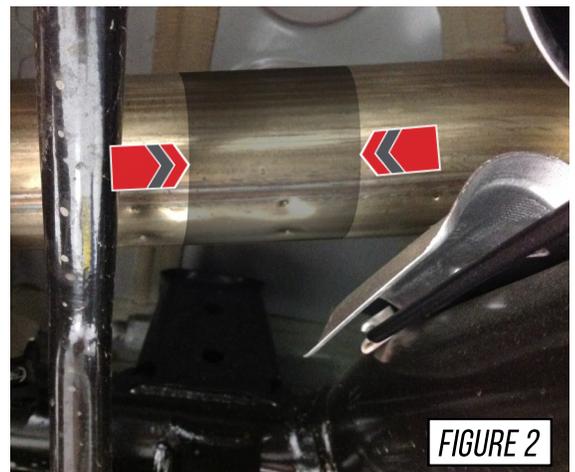

STEP 3



When including the AWE Performance Downpipe, the cat back exhaust system should be installed and aligned *after* the downpipe is installed.


The OEM sleeve clamp, shown at **Arrow A**, is re-used to connect the inlet adapter (part HB) to the factory downpipe, at **Arrow B** in **Figure 3**.

Attach the front section (part A2.5) to the inlet adapter using one of the included 63.5mm AccuSeal band clamp, at **Arrow C** in **Figure 3**.

Install the remainder of the exhaust sections.



NOTE: For Jetta 1.4T installations, the inlet section (part A02) replaces the inlet adapter (part HB).

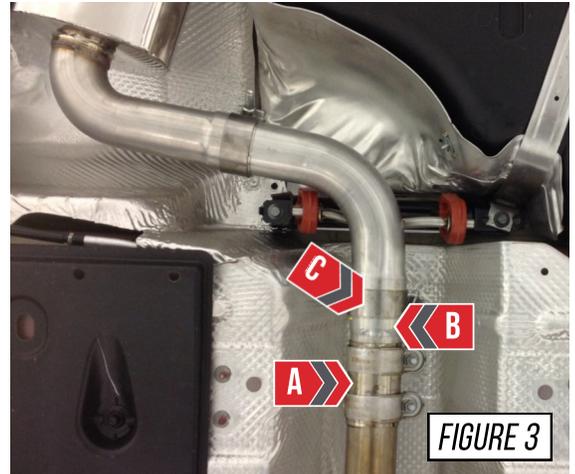

STEP 4



Stainless steel exhaust systems “grow” in length up to 1” during normal use.


To compensate for exhaust expansion, each rubber hanger should be pushed toward the front of the vehicle to allow each section of exhaust to seat into the corresponding tube section.

Torque the AccuSeal band clamps to 40 ft/lbs.

With the cat back exhaust system properly secure, install a hanger lock collar on each of the hangers, at the arrow in **Figure 4**. Snug the lock collar against the rubber grommet and tighten with the enclosed allen wrench.

The hanger lock collar prevents the exhaust from sliding laterally under usage, keeping the tips properly aligned in the valence openings.

Stagger the exhaust tips with the logo facing up, being mindful of how the exhaust will expand. Tighten the integrated clamps snug until the tips do not rotate; an additional full turn on the nut locks them in place.

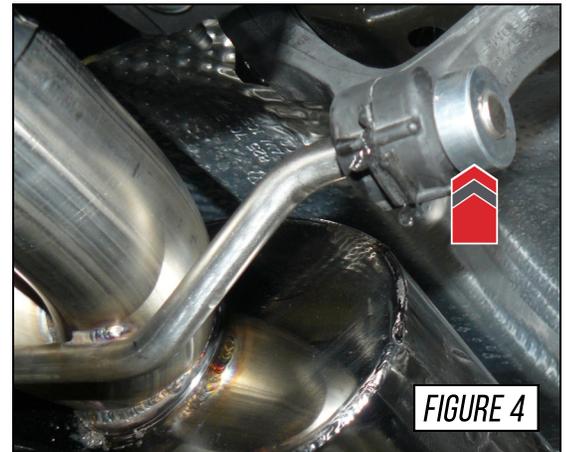

ENJOY!



CARE

Once installed properly, the AWE Performance Exhaust will provide years of trouble-free performance.

The exhaust volume and sound will settle with usage; 800-1000 miles is required to break-in new exhaust systems.

Also please note that the rear Helmholtz resonator has a small drain hole to allow condensation to escape. Water drops from this area are normal.

Periodic cleaning of exhaust tips is necessary to maintain proper finish, especially in areas prone to road salt and caustic deicing solutions. Use a mild soap and water solution or car wax to clean the finish. Avoid using metal polishes, as they can scratch the finish.

Any questions or comments,
please do not hesitate to contact us:

AWE

199 Precision Drive
Horsham, PA 19044

215-658-1670
performance@AWE-Tuning.com

WARRANTY

Summary:

This warranty is in place for all AWE brand products, and works in conjunction with any incremental specific product warranties or guarantees as listed on AWE-Tuning.com. This warranty protects against manufacturer defect. A performance car is only as strong as its weakest link. Therefore, it is vital that you maintain your vehicle to factory specifications. By installing or using the purchased product, the Consumer accepts this warranty and any specific Manufacturer warranties enclosed. The following warranty is valid only in the United States and Canada. The Manufacturer's full warranty applies to all products sold.

Covered:

All AWE brand products against manufacturer defect. Please note that special order items are not returnable.

Period:

Secor Ltd. (AWE) warrants this **Touring Edition or Track Edition Exhaust** for the **2015+ VW Jetta 1.8T ~ or ~ 1.4T**; to the original retail purchaser (Consumer) against manufacturer's defects as follows: **ONE (1) YEAR on tip finish, LIFETIME on balance of parts**; from purchase date from AWE directly or from AWE authorized retailer. Proof of purchase will be required.

Condition of system:

In the event of a return, product must be returned with no signs of abuse, incorrect installation, forced installation, motorsports usage, or product altering whatsoever. Actions will be granted upon receipt of product at AWE, after inspection.

Action:

Returns and warranty claims MUST BE HANDLED THROUGH ORIGINAL LOCATION OF PURCHASE. Upon verification of warranty coverage, AWE will, at its sole option, repair, replace or consult toward remedy for the defective product, without charge. This is the only remedy the Consumer has for any loss or damage, however arising, due to nonconformity in or defect of the product. This warranty does not cover consequential damage, loss of time or revenues, labor, inconvenience, loss of use of vehicle, shipping, damage to the vehicle or components, or other incidental or indirect damage.

Labor:

Labor is not covered.

Shipping:

Shipping charges are not covered.

Restocking:

AWE reserves the right to charge a 20% restocking fee for products that are returned.

Exclusions:

Use of product in Motorsports or Racing conditions is grounds for warranty denial. Motorsports and Racing is an inherently abusive operational condition, and it is impossible to warranty for this type of usage. Warranties may be voided if product is not installed by an authorized AWE dealer. Warranties will be voided if product is improperly serviced, modified, or used in a way not intended by the Manufacturer. The Consumer is responsible for ensuring that the product is installed in a safe and proper manner, and should cease usage of the product immediately if an unsafe or improper condition is noted. If an unsafe or improper condition is noted, the Consumer should then immediately contact the facility where the product was installed, or AWE.

Other:

EXCEPT AS EXPRESSLY SET FORTH ABOVE, AWE MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO ANY MATTER WHATSOEVER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL AWE BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES HOWEVER CAUSED, ON ANY THEORY OF LIABILITY, AND WHETHER OR NOT AWE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. AWE's sole liability on any claim of any kind, whether in contract, tort, or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of the products sold hereunder shall in no case exceed the amount actually paid to AWE for the applicable product. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy.