



## INSTALLATION INSTRUCTIONS

### Jeep JL Side Window Kit

**KIT CONTENTS:**

**LEATHER LOOK FINISH**

50176 Jeep JL 4 dr2018-UP Grey Leather Look 4pc  
 50177 Jeep JL 4 dr2018-UP Black Leather Look 4pc


**ORIGINAL FINISH**

50173 Jeep JL 4 dr2018-UP Black 4pc  
 50174 Jeep JL 4 dr2018-UP Grey 4pc  
 50175 Jeep JL 4 dr2018-UP White 4pc

**TOOLS:**  
 Use manufacturer's suggested tools for hardtop removal.

**NOTES:** This kit is designed to fit Jeep Wrangler JL equipped with factory hardtops. We suggest you remove the hardtop from vehicle and place on the floor in an inverted position. Placing the hardtop on a blanket is recommended to protect it from scratches. Test fit the parts in place with the paper release liner left in place to note its position and where it will be installed. Once the adhesive contacts a clean surface, it is extremely difficult to remove the adhesive. Be sure the part is in the desired position before adhering it!

**SURFACE PREP:**  
 Vacuum or wipe down installation area to remove all loose debris/dust. Then clean with isopropyl alcohol to remove any contaminants.

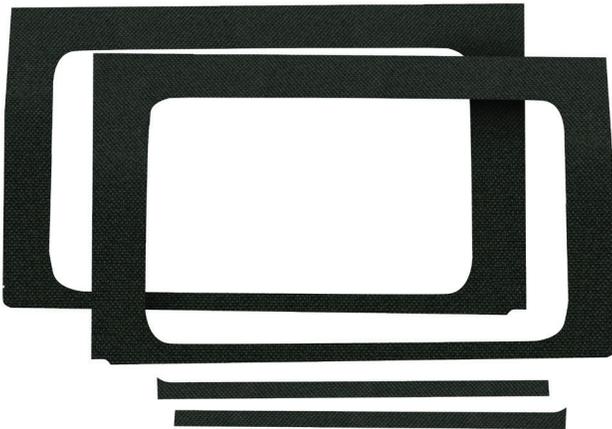

Kit consists of 2 side window trim pieces and two trim strips for above the doors on the second row of seats.



Figure 1

- 1.) Remove the hardtop from vehicle following the manufacturer's suggested removal procedure. Placing the hardtop on a blanket is recommended to protect it from scratches. Make sure to place the hardtop on the blanket in an inverted position.
- 2.) Once the hardtop is removed, clean the surface with isopropyl alcohol. This ensures a good adhesive bond between the window kit and the hardtop. \*Note: The adhesive will not stick properly to a dirty surface.
- 3.) Test fit to determine the correct placement for each side. (Figure 1)



Figure 2

4.) Peel paper backing slowly and press fit piece as you pull backing off.  
(Figure 2)



Figure 3

5.) Firmly press window trim piece in place after entire backing is removed to ensure a tight bond on entire piece. (Figure 3)



6.) Test fit rear seat window trim strip. Peel paper backing slowly and press fit piece as you pull backing off.

7.) Reinstall the hardtop according to the manufacturer's suggested installation procedure.



[www.BoomMat.com](http://www.BoomMat.com)