

Installation Instructions

For Set # 3.4175
07-13 GM/GMC 1500
4WD Extended Cab & Crew Cab
Body Mount Set

ENERGY
SUSPENSION

1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

© 2019 Energy Suspension. All rights reserved.
May not be reproduced, in any form, or by any means,
without the written consent of Energy Suspension.


It is recommended that if you are unfamiliar with this type of work that you refer to a qualified service center specializing in this type of work. It is also recommended that if you choose to do this work yourself that a factory service manual be obtained for the proper procedures pertaining to removal, replacement and proper torque specifications for your vehicle. This instruction set is intended as a guideline for the safe installation of Energy Suspension's polyurethane bushings, once you have removed the factory components from your vehicle. Wheel alignment is almost always disturbed when suspension components are removed or replaced. It is recommended that you have the alignment checked on your vehicle at a qualified alignment shop. Energy Suspension recommends that you read over all the installation instructions and check all P/N's and quantities in the parts list before you start. Call customer service at 949-361-3935 if the parts in your kit do not match this parts list. Prior to installation, make sure that your vehicle is in top mechanical condition and that there are no suspension or steering related problems. This part has been designed to work only with a vehicle that is in good state of repair. No matter how carefully we design our parts, this is one area we have no control over and cannot be held responsible.

Installation:

Loosen bolts on one side of vehicle, then remove bolts on other side. Never put jack directly on body panels. When jacking the body use a long wood 2X4 or 4X4 for maximum support. Lift the body one side at a time and only high enough to remove & replace mounts. NOTE: When lifting and lowering the body, watch the fan shroud, brake lines, fuel lines, cables, linkages and wiring harness for sufficient clearance when raising the body. It may be necessary to unhook the E-brake cable and ground strap when lifting the driver side. Must reuse O.E. upper metal cups and bolts for positions 1, 2 & 3. Use WD-40 to help remove rubber mounts from metal cups. Position 4 must reuse lower washers and bolts. Torque fasteners to factory specs. Recheck and torque fasteners after 200 and 500 miles.

Parts list:

- 6 - 04P04360 (Upper body mount pos. 1, 2 & 3)
- 6 - 4201 (Lower body mount pos. 1, 2 & 3)
- 2 - 04P04415 (Upper body mount pos. 4)
- 2 - 04P04416 (Lower body mount pos. 4)
- 6 - 15.03.11.39 (Washer 3.00" x .563" x .125")
- 2 - 15.03.138.39 (Washer 3.50" x .563" .125")
- 2 - 15.10.655.39 (Sleeve 1.25" x .790" x 2.675")

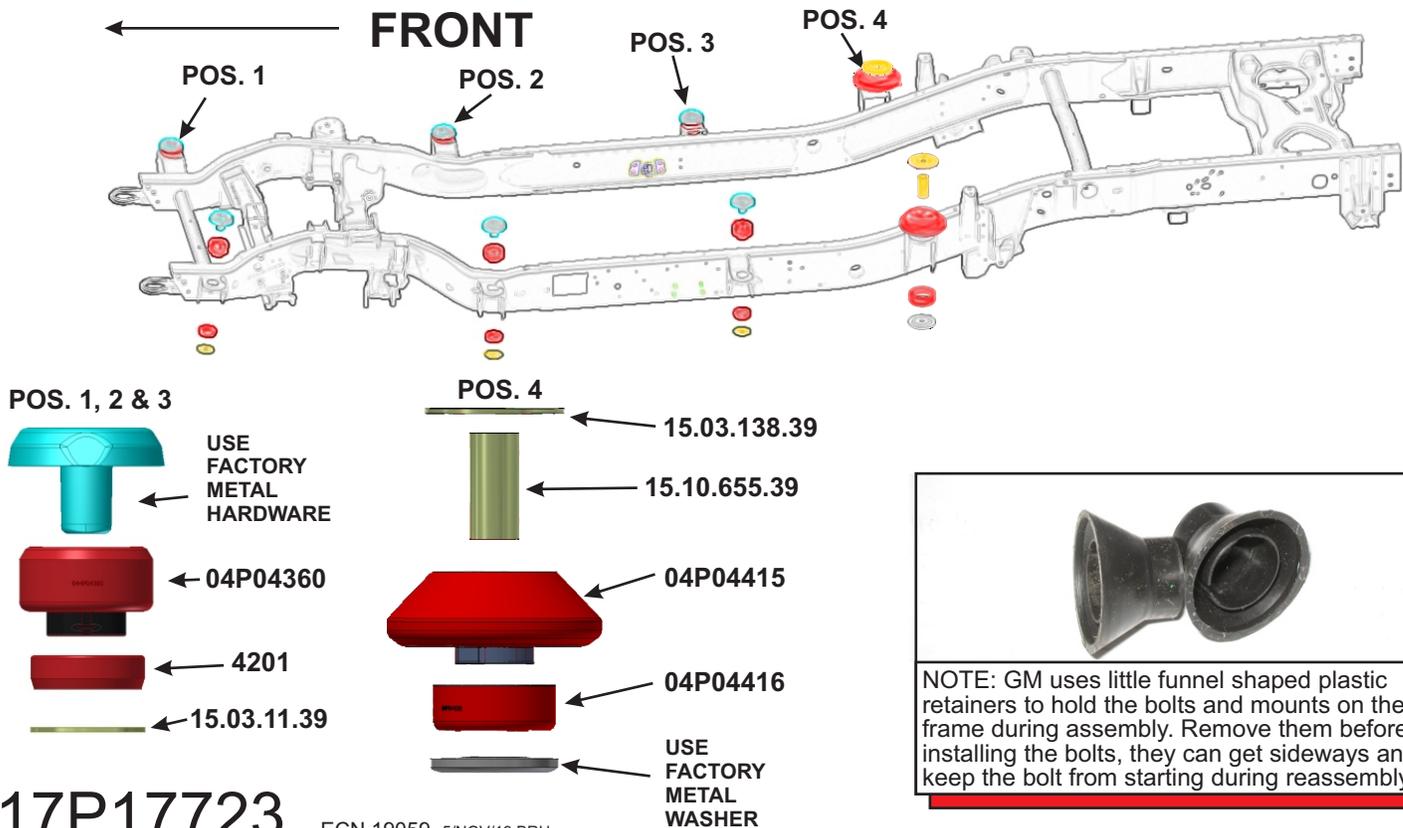

17P17723

ECN 19059 5/NOV/19 BRH