

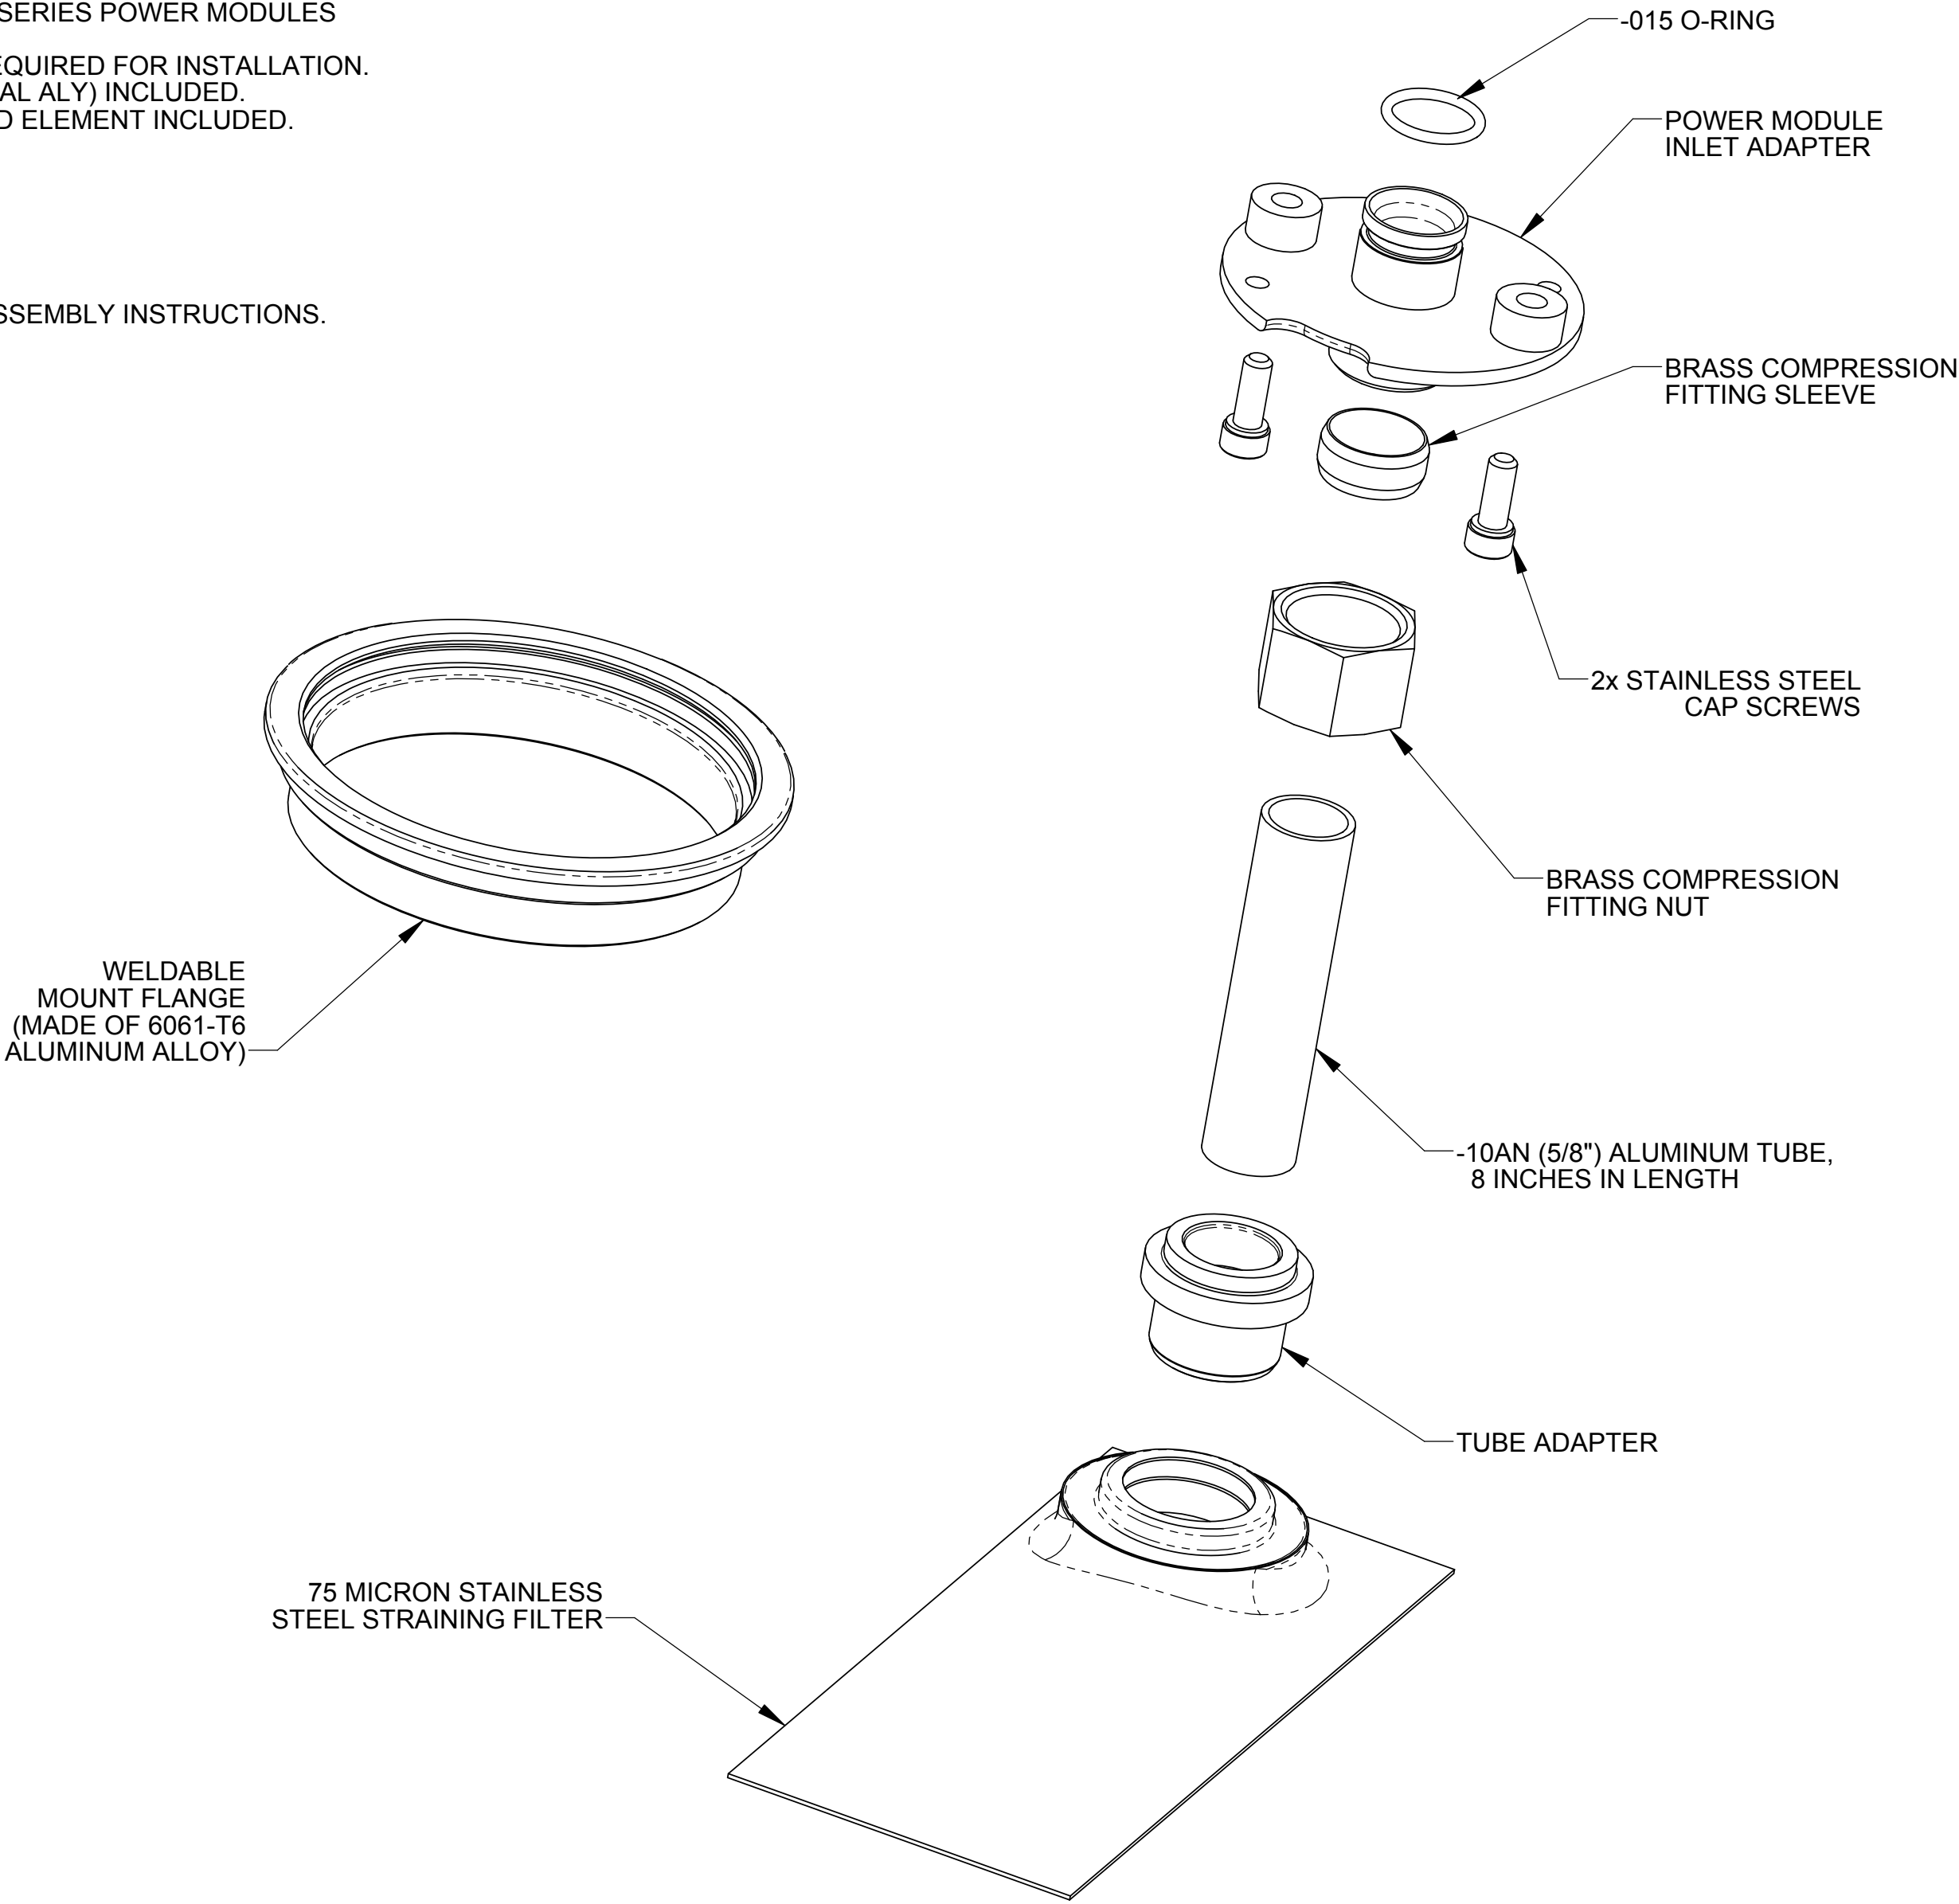


- NOTES:**
- 1. THIS DRAWING DESCRIBES THE FUELAB MODEL 20902 FABRICATOR INSTALLATION KIT.
 - 2. FEATURES INCLUDE:
 - FOR USE WITH 909xx, 919xx AND 929xx SERIES POWER MODULES (NOT INCLUDED).
 - METAL FABRICATION AND WELDING REQUIRED FOR INSTALLATION.
 - MOUNTING FLANGE (MADE OF 6061-T6 AL ALY) INCLUDED.
 - STAINLESS STEEL 75μ RELATIVE RATED ELEMENT INCLUDED.
 - 3. FUEL COMPATIBILITY INCLUDES:
 - GASOLINE (PUMP OR RACE)
 - METHANOL
 - ETHANOL (INCLUDING E85)
 - DIESEL
 - 4. REFERENCE DRAWING 1490201A1 FOR ASSEMBLY INSTRUCTIONS.



CONTENTS OF INSTALLATION KIT SHOWN ABOVE

UNLESS OTHERWISE SPECIFIED: INTERPRET DWG PER ANSI Y14.5 DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64" ANGULAR: ± 1/2° DECIMALS: X ± 1 .XX ± .03 .XXX ± .010 SURFACE FINISH 128 ✓ OR BETTER BREAK ALL SHARP EDGES .010 MAX REMOVE ALL BURRS		 <i>Litchfield, Illinois</i>	
THIRD ANGLE PROJECTION 		TITLE: INSTALLATION KIT, MODEL 20902	
DO NOT SCALE DRAWING	SIZE C	DWG. NO. 149020200	REV
SCALE: 1/1	WEIGHT: .95 LB	SHEET: 1 OF 2	

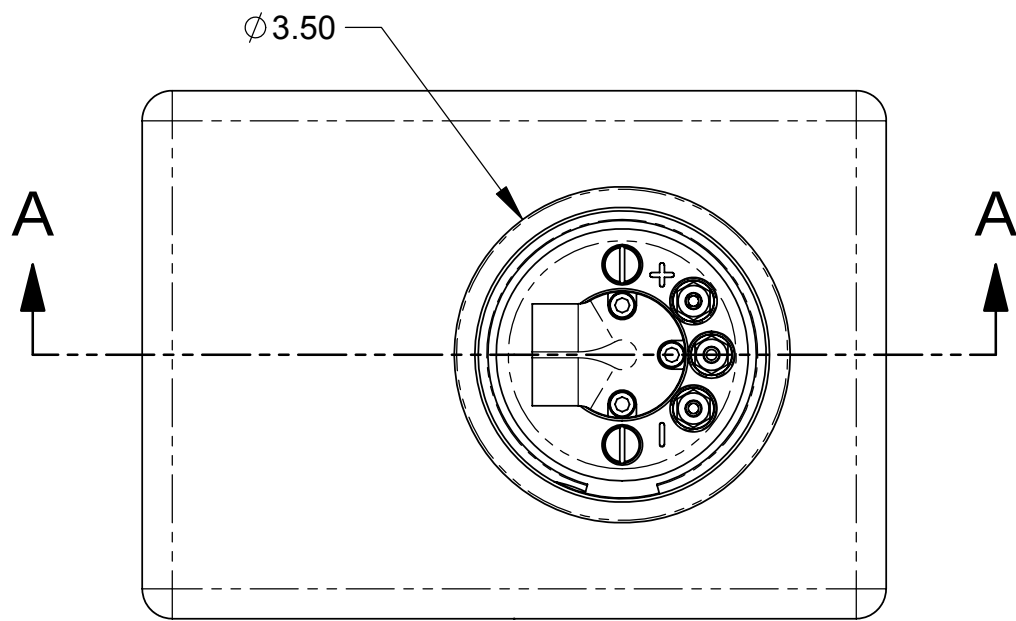


SCALE: 1/2

WELDING REQUIRED
TO ATTACH FLANGE
TO FUEL TANK


FUELAB POWER MODULE
SHOWN INSTALLED.
(SOLD SEPARATELY)

2X OUTLET PORT FOR OPTIONAL
EXTERNAL EDUCTOR (JET) PUMP.

16.000 MAXIMUM
TANK DEPTH

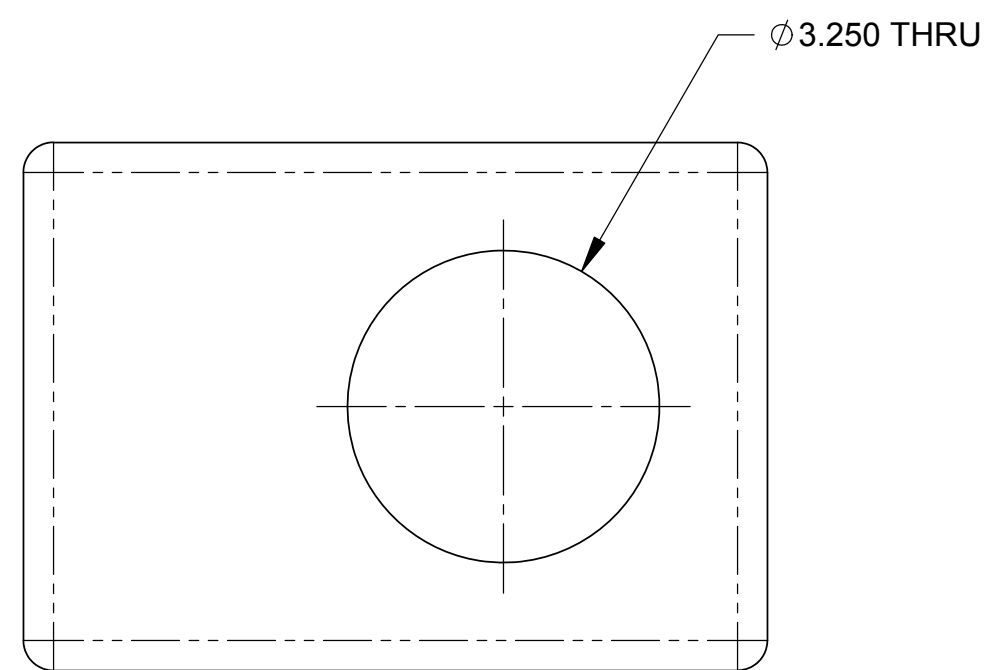


TANK FABRICATION REQUIREMENT
SHOWN ABOVE
SCALE: 1/2

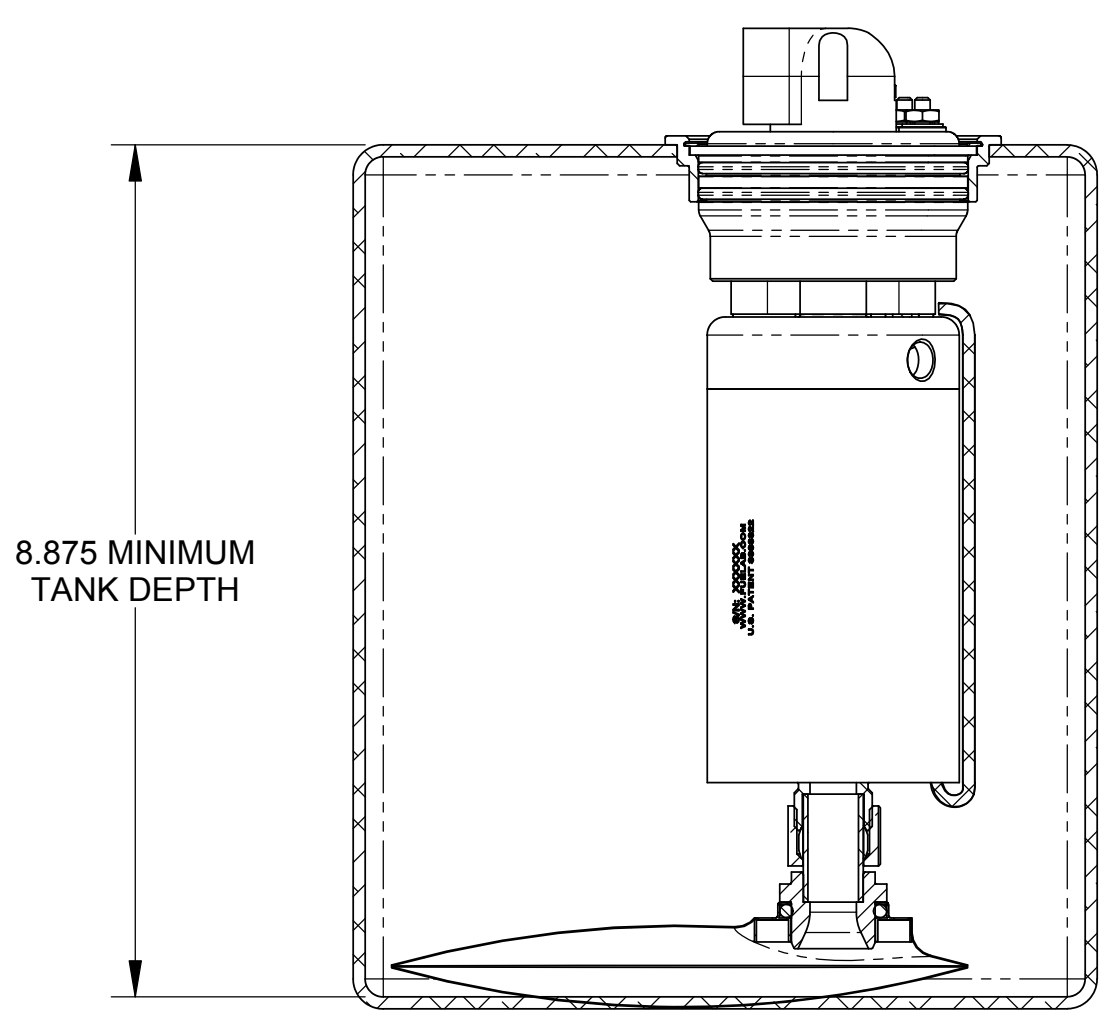


8.875 MINIMUM
TANK DEPTH

SECTION A-A
MINIMUM INSTALLATION HEIGHT
SHOWN ABOVE
SCALE: 1/2

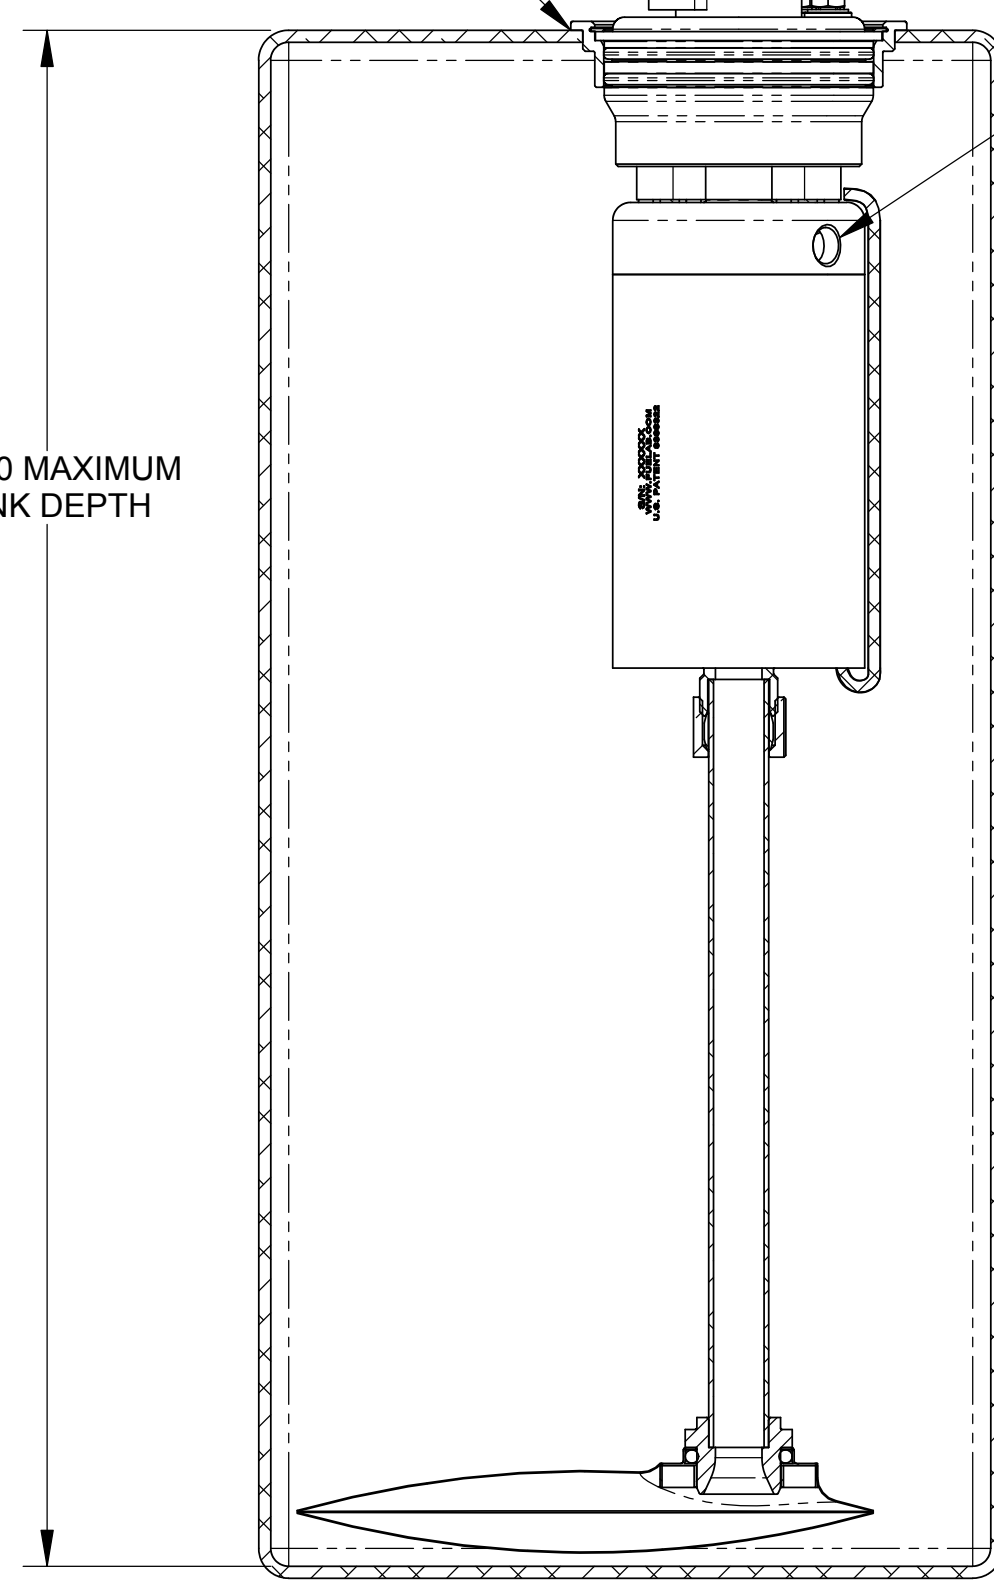

MAXIMUM INSTALLATION HEIGHT
SHOWN ABOVE
SCALE: 1/2

UNLESS OTHERWISE SPECIFIED:		 <i>Litchfield, Illinois</i>	
INTERPRET DWG PER ANSI Y14.5 DIMENSIONS ARE IN INCHES		TITLE: INSTALLATION KIT, MODEL 20902	
TOLERANCES: FRACTIONAL: ±1/64" ANGULAR: ± 1/2° DECIMALS: X ± 1 .XX ± .03 .XXX ± .010 SURFACE FINISH 128 OR BETTER BREAK ALL SHARP EDGES .010 MAX REMOVE ALL BURRS		SIZE C	DWG. NO. 149020200
THIRD ANGLE PROJECTION 		SCALE: 1/1	REV
DO NOT SCALE DRAWING		WEIGHT:	SHEET: 2 OF 2