

In-Line Compact Filter

DWFF55c

(8-03-55C-010K)




DW fuel filters are compatible with a wide range of fuels including pump gas, race gas, MTBE, ethanol, methanol, and diesel. DW recommends a maximum service interval of 12 months or 12,000 miles. Shorter service intervals are recommended with harsher conditions and corrosive fuels.

- 5/16" Hose Barb Inlet/Outlet
- 55mm Filter Element Length
- Universal Fitment, Compatible With All Popular Fuels
- Cleanable Stainless Steel Mesh 10 Micron Element
- Dual Stage Filter System, Stainless Mesh and Magnetic
- High Pleat Count For Improved Flow Rating

Specifications


Weight	2.4 oz (68 grams)
External Materials	Anodized T6061 Aluminum
Inlet Fitting	5/16" Hose Barb
Outlet Fitting	5/16" Hose Barb
Sealing	Viton O-rings
Mechanical Filtration	304 Stainless Steel Mesh
Magnetic Filtration	35mm Neodymium Ring
Flow Rating (10μ)	200 LPH @ 1PSI Drop
Avg Surface Area	15 Square-Inch's

Pressure Drop

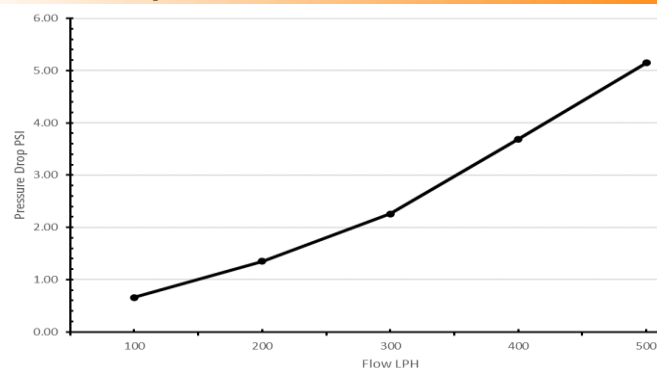

Flow (LPH)	100	200	300	400	500
Pressure Drop (PSI)	0.66	1.35	2.26	3.69	5.15

Dimensions

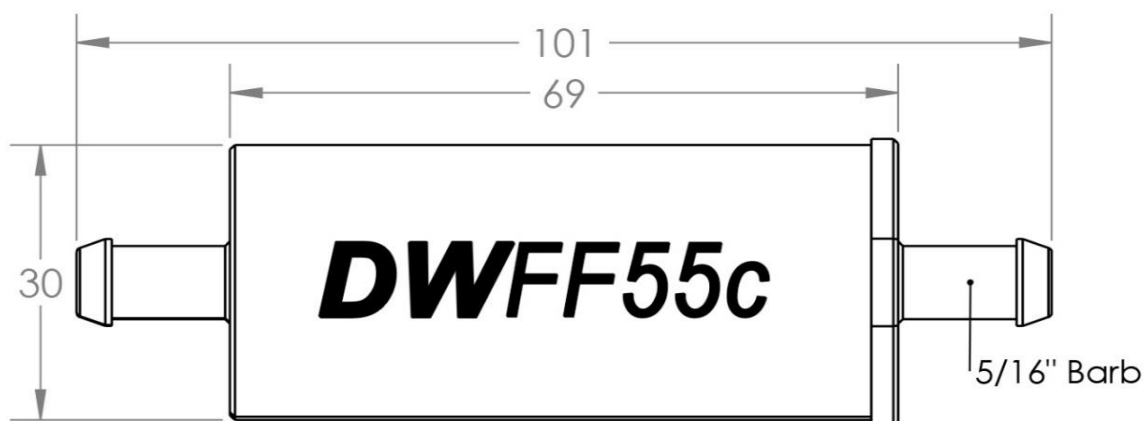

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION