

In-Line Compact Filter

DWFF70c

(8-03-70C-010K*)



*8-03-70C-010K-6 includes 6AN Male Flare Fittings

*8-03-70C-010K-8 includes 8AN Male Flare Fittings


*8-03-70C-010K-516 includes 5/16" Hose Barb Fittings

*8-03-70C-010K-38 includes 3/8" Hose Barb Fittings

Specifications

Weight	4.9 oz (140 grams)
External Materials	Anodized T6061 Aluminum
Inlet Fitting	8AN ORB
Outlet Fitting	8AN ORB
Sealing	Viton O-rings
Mechanical Filtration	304 Stainless Steel Mesh
Magnetic Filtration	35mm Neodymium Ring
Flow Rating (10μ)	900 LPH @ 1PSI Drop
Avg Surface Area	23 Square-Inch's


Dimensions

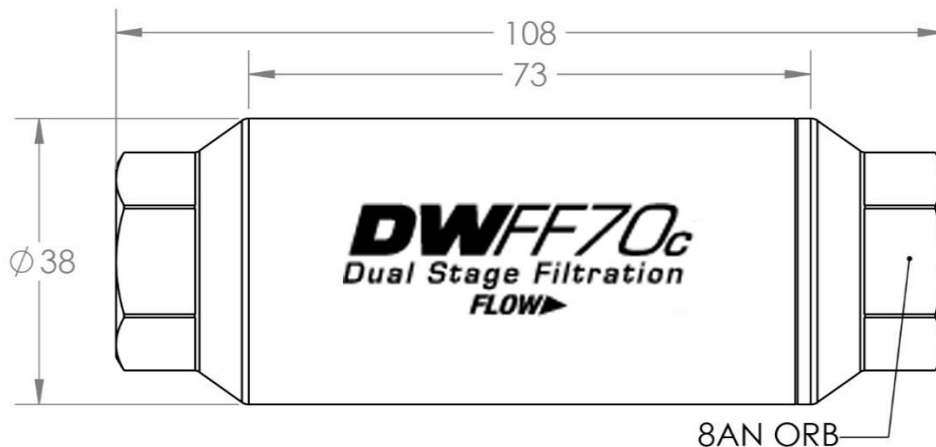

DW fuel filters are compatible with a wide range of fuels including pump gas, race gas, MTBE, ethanol, methanol, and diesel. DW recommends a maximum service interval of 12 months or 12,000 miles. Shorter service intervals are recommended with harsher conditions and corrosive fuels.

- 8AN ORB Inlet/Outlet
- 70mm Filter Element Length
- Universal Fitment, Compatible With All Popular Fuels
- Available with 6AN, 8AN, 5/16 and 3/8 Barb Fittings
- Dual Stage Filter System, Mesh and Magnetic
- High Pleat Count For Improved Flow Rating

Pressure Drop

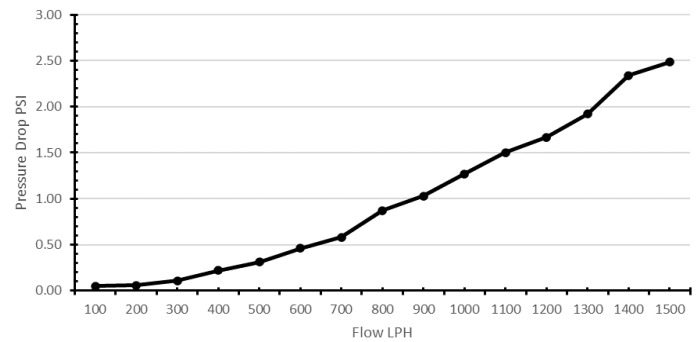

Flow (LPH)	300	400	500	600	700	800	900
Drop (PSI)	0.11	0.22	0.31	0.46	0.58	0.87	1.03

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION