

Haltech Off-Road Usage Policy

It is unlawful to tamper with your vehicle's emissions equipment. Haltech products are designed and sold for sanctioned off-road/competition non-emissions controlled vehicles only. Using Haltech products for street/road use on public roads is prohibited by law. It is the responsibility of the installer and/or user of this product to ensure compliance with all applicable local and federal laws and regulations. Please check with your local vehicle authority before using any Haltech product

Installation of Haltech Products

No responsibility whatsoever is accepted by Haltech for the fitment of Haltech Products. The onus is clearly on the installer to ensure that both their knowledge and the parts selected are correct for that particular application. Any damage to parts or consequential damage or costs resulting from the incorrect installation of Haltech products are totally the responsibility of the installer.

Haltech Limited Warranty

Unless specified otherwise, Haltech warrants its products to be free from defects in material or workmanship for a period of 12 months from the date of purchase. Proof of purchase in the form of a copy of the original purchase invoice, receipt or bill of sale which indicates that the product is within the warranty period, must be presented to obtain warranty service. If the Haltech product is found to be defective as mentioned above, it will be replaced or repaired if returned prepaid along with proof of purchase. This shall constitute the sole liability of Haltech. To the extent permitted by law, the foregoing is exclusive and in lieu of all other warranties or representations, either expressed or implied, including any implied warranty of merchantability or fitness. In no event shall Haltech, be liable for special or consequential damages.

Product Returns

Please include a copy of the original purchase invoice, receipt or bill of sale along with the unused, undamaged product and its original packaging. Any product returned with missing accessory items or packaging will incur extra charges to return the item to a re-saleable condition. All product returns must be sent via a freight method with adequate tracking, insurance and proof of delivery services. Haltech will not be held responsible for product returns lost during transit. The sale of any sensor or accessory that is supplied in sealed packaging is strictly non-refundable if the sealed packaging has been opened or tampered with. This will be clearly noted on the product packaging. If you do not accept these terms please return the sensor in its original unopened packaging within 30 days for a full refund.

Returning a sensor or accessory product within 30 days of purchase: Product may be returned for credit or full refund. (Any sealed packaging must not have been opened or tampered with)

Returning a sensor or accessory product after 30 days of purchase: Product may be returned for credit only (no refunds given) and is subject to a 10% Restocking fee. (Any sealed packaging must not have been opened or tampered with)

Template #2



HT-020400

Boost Control Solenoid 3 Port 1/8th NPT- 33Hz (inc hose fittings, rubber isolated mount and matching DTM 2 plug and pins set)

Boost Control Solenoid 3 Port 1/8th NPT- 33Hz (inc hose fittings, rubber isolated mount and matching DTM 2 plug and pins set)




* Recommended control frequency is 33Hz

Termination
POWER (+12V SWITCHED)
HALTECH OUTPUT


* This part is not polarity sensitive
and can be wired in either orientation

Connection Methods




Internal Wastegate

Port 1 : Vent to Air Filter
Port 2 : To Internal Wastegate Actuator
Port 3 : To Turbo Pressure Source



External Wastegate (Type 1 - Low Boost Setup)

Port 1 : Vent to Air Filter
Port 2 : To Bottom Port of Wastegate
Port 3 : To Turbo Pressure Source



External Wastegate (Type 2 - High Boost Setup)

Port 1 : To Turbo Pressure and Bottom Port
of Wastegate (via a tee piece)
Port 2 : To Top Port of Wastegate
Port 3 : Vent to Air Filter

HT-020400



Revision #4

Need more help?

Intl: +61 2 9729 0999
USA: +1 888 298 8116

Intl: support@haltech.com
USA: usasupport@haltech.com


www.haltech.com

/Haltechecu

/HaltechEngineManagement


Deutsch DT/DTM Series Connector Assembly Instructions

How to Crimp solid type pins

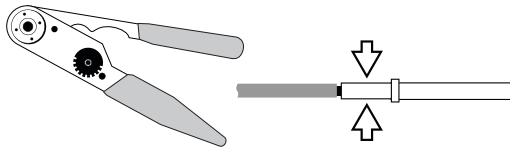

Use Crimper set HT-070304


How to Crimp stamped type pins

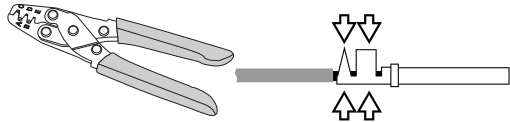

Use Crimper set HT-070300


*** Please remember soldering the wire into the pin is not recommended**

Male Plug (Uses female pins)

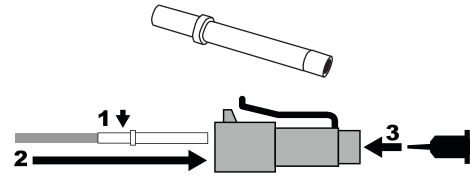

- (1) Crimp Pin to wire and then
- (2) Insert into harness side of Plug
- (3) Insert Wedge to lock the pin into the connector

Female Receptacle/Socket (Uses male pins)

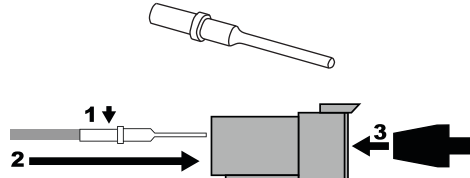

- (1) Crimp Pin to wire and then
- (2) Insert into harness side of Plug
- (3) Insert Wedge to lock the pin into the connector

Deutsch DT/DTM



Revision #1

Need more help?

Intl: +61 2 9729 0999
USA: +1 888 298 8116

Intl: support@haltech.com
USA: usasupport@haltech.com

www.haltech.com

/Haltechecu

/HaltechEngineManagement