



**DINAN**

## Wheel Package

**D750-0087-GAIR-BLK/SIL**

**D750-0087-SEI-BLK/SIL**

Fits: F80 M3 & F82/F83 M4

Congratulations on the purchase of a Dinan Wheel Package for your car. Hours of research and development have gone into our packages to ensure that all of our components work in concert with each other. Our goal is to improve upon the excellent performance already engineered into every BMW by the factory.

---

### PARTS LIST

Qty	Part Number	Description
1	D210-2013	1/8" Wheel Spacer Kit
2	D755-8095/31-xxx	Dinan 20"x9.5" Wheel
2	D755-8005/42-xxx	Dinan 20"x10.5" Wheel


---

### **BEFORE YOU BEGIN:**

- Refer to the parts list above. Verify that all components are present and were received in good condition. Please contact your Dinan representative if there are any concerns.
- This is a large wheel & tire fitment. Tire clearance must be carefully evaluated:
  - During and after installation of this kit;
  - After any ride height change;
  - After any alteration to the original tire/wheel package.
- **If there is insufficient clearance, safety will be compromised! Dinan is not responsible for any damages or injury!**

## **INSTALLATION NOTES:**

- The 20"x9.5" wheels are for the front of the car.
  - Confirm you have the correct wheels. The wheels should measure about 10.5" wide overall, and stamped with "31" on the inside.
  - These wheels must be installed with the Dinan Wheel Spacer Kit. Failure to properly install the spacers could result in immediate and significant tire and vehicle damage!
  - Measure the wheel spacer to confirm correct thickness of **3mm**.
  - Install spacers per the included instructions.
  - The stock lug bolts are reused with this fitment.
- The 20"x10.5" wheels are for the rear of the car.
  - Confirm you have the correct wheels. The wheels should measure about 11.5" wide overall, and stamped with "42" on the inside.
  - The stock lug bolts are reused with this fitment.
- Check for adequate clearance between vehicle and wheel/tire after installation, in all combinations of suspension travel and steering angle.
- There is one spot in the right rear that deserves careful attention (see indicated area in photo below).

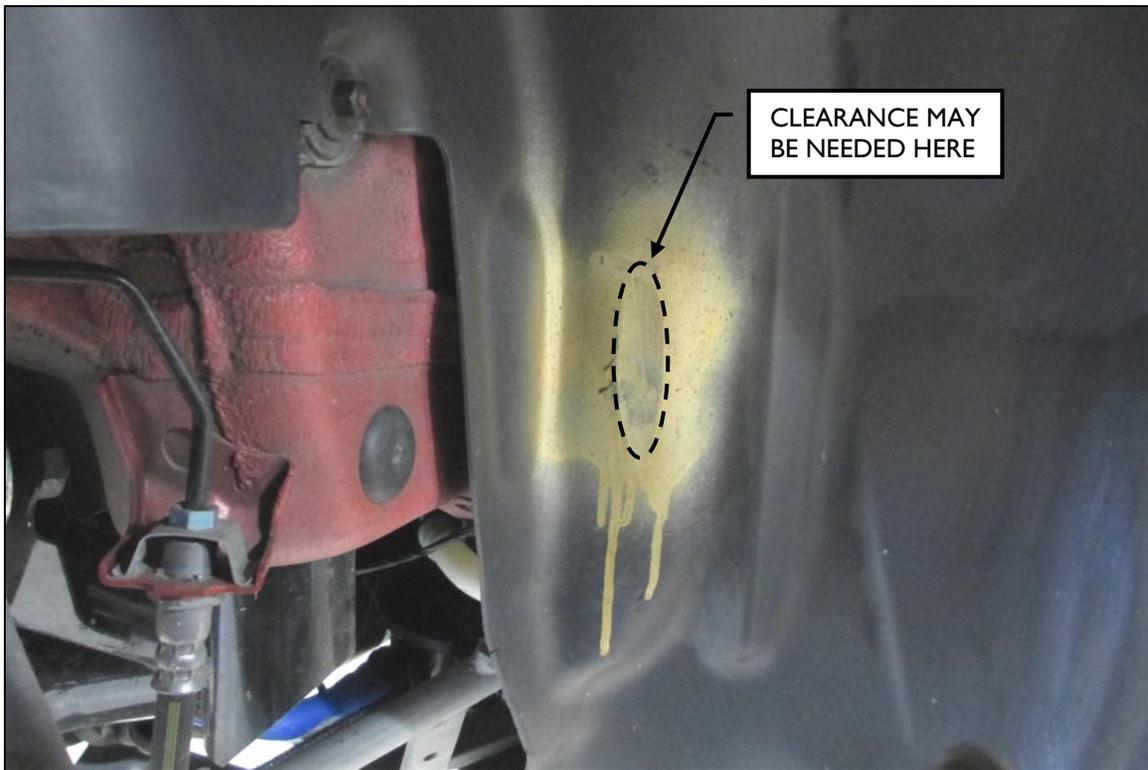

- If additional clearance is needed at this location:
  - Carefully warm up this area (there is a fuel/evap line behind the wheel well liner).
  - Using a broom handle or similar tool, apply pressure to this area to reshape plastic liner away from tire.
  - Let the area cool, and remove your tool.

## **WHEEL CARE:**

Proper care will enhance the appearance of your Dinan wheels. Improper care may damage the finish of the painted and polished aluminum surfaces. Please adhere to the following guidelines in order to preserve the appearance of your Dinan wheels.

- Wash the wheels frequently with cold water and a mild soap only.
- Use a sable brush to loosen dust in the lug pockets, spokes, etc.
- Pat dry with a cotton towel or air dry by driving after washing.
- Never use acidic wheel cleaner products or detergents.
- Brake pad dust can be highly acidic. Do not allow brake dust to remain on the wheels for extended periods.
- Review these wheel cleaning procedures with your detail shop in order to avoid the use of inappropriate cleaning products.

Happy Motoring!