

# AEROMOTIVE Part # 17256

Phantom/Stealth Tank - Carbureted System to Complete Return Style for Engines with 2-Barrel or 4-Barrel Carburetors

### INSTALLATION INSTRUCTIONS

This product is not legal for sale or use on emission-controlled vehicles except when used as a direct replacement part matching OEM specification.

### **WARNING!**



Always be aware of flammable situations. Drilling and grinding can be potential ignition sources. Extinguish all open flames, prohibit smoking and eliminate all sources of ignition in the area of the vehicle and workspace before proceeding with the installation. Ensure you are working in a well ventilated area with an approved fire extinguisher nearby.

### **WARNING!**



Installation of this product requires modification to a fuel tank/ the fuel system, failure to satisfy all safety considerations will result in fire, explosion, injury and/or loss of life to yourself and/or others. All fuel system components MUST be located as far from heat sources as possible, like exhaust, engine block,

etc.

### **WARNING!**



Mechanical and hydraulic lifting devices can tip over or lower accidentally due to incorrect maneuvering or technical errors. A falling object can cause injury and/or loss of life to yourself and/or others. When working under the vehicle, always use stands, and ensure that the ground or floor is stable and level. Never crawl under a vehicle which is only supported by a jack.

### **WARNING!**



The fuel system is under pressure. Do not open the fuel system until the pressure has been relieved. Refer to the appropriate vehicle service manual for the procedure and precautions for relieving the fuel system pressure.

### **CAUTION!**



When installing this product always wear safety glasses and other appropriate safety apparel. A drilling operation will cause flying metal chips. Flying metal chips can cause eye injury.

# **CAUTION:**



Installation of this product requires detailed knowledge of automotive systems and repair procedures. We recommend that this installation be carried out by a qualified automotive technician. Careless installation of this product can result in damage to the product, injury or loss of life to yourself and/or others.

| Compatible Fuels: |
|-------------------|
| Pump Gas          |
| Race Gas          |
| E85               |
| Alcohol/Ethanol   |

### Parts Included:

| 1ea p/n 12377 Filter Assembly, 10-micron     | 1ea p/n 15606 AN-06 ORB to AN-06 flare |
|--|--|
| 1ea p/n 12701 Filter Bracket                 | 3ea p/n 15607 AN-08 ORB to AN-08 flare |
| 1ea p/n 13304 Fuel Pressure Regulator, Carb. | 1ea p/n 15632 0-15 PSI Pressure Gauge  |
| 1ea p/n 15605 AN-08 ORB to AN-06 flare       | 2ea p/n 15649 AN-06 ORB to AN-08 flare |

Aeromotive system components are not legal for sale or use on emission controlled motor vehicles.

The enclosed Aeromotive Fuel System Kit is designed to give the end user a basic fuel system, less the fuel pump, AN fuel lines and hose-ends, fuel log and/or carburetor fittings. It is intended to work with an Aeromotive Stealth Tank or Phantom kit to support a return style, single carbureted application with a single AN-06 or AN-08 inlet connection. May be used with dual inlet 4-barrel carburetors with a carburetor fuel log to connect multiple fuel bowls, fuel log not included.

A return line of AN-08 or ½" equivalent diameter must be installed from the regulator back to the tank, after which base fuel pressure will be adjustable in a range between 3-14 PSI. The included regulator is Aeromotive's newest design, which is fully serviceable and convertible, supporting any future plans to convert to EFI by simply obtaining and installing EFI conversion kit, either p/n 13013 or 13015. This regulator provides a standard 1:1 ratio boost reference, making the system suitable for all carbureted engines, both Naturally Aspirated and "Blow Through" Forced Induction.

This installation instruction provides a diagram that outlines the overall layout of the fuel system intended with the enclosed components. The system diagram illustrates the components used, their locations relative to each other and in relation to fuel flow, including general fuel line routing and the AN fuel line sizes required. This is a system overview. Please refer to each individual component's installation instructions for detailed installation help with that particular component. Please contact Aeromotive for any recommendations on fuel line or additional fitting requirements.

Failure to follow the above recommendations may result in fuel leakage, bursting of the fuel lines, poor vehicle performance and/or decreased fuel pump life! Improper installation will void all warranties for this product!

| Aeromotive Commonly Used Fuel Logs;               | 15651 - AN-06 45-Deg. Hose End  |
|---|---------------------------------|
| 14201 - Fuel Log, Bowl Thread 7/8" x 20 TPI       | 15652 - AN-06 90-Deg. Hose End  |
| 14202 - Fuel Log, Bowl Thread 9/16" x 24 TPI      | 15653 - AN-08 Straight Hose End |
| 14203 - Fuel Log, Bowl Thread 3/4" x 16 TPI       | 15654 - AN-08 45-Deg. Hose End  |
| 14601 - Fuel Distribution Log, 2x AN-06, 2x AN-08 | 15655 - AN-08 90-Deg. Hose End  |
| 14602 - Fuel Distribution Log, 8x AN-06, 2x AN-10 | 15663 - AN-08 180-Deg. Hose End |
|   |                                 |

### Aeromotive Commonly Used Carb. Fittings;

15201 - AN-06 to 7/8" x 20 TPI 15207 - AN-06 to 9/16" x 24 TPI

### Aeromotive Commonly Used Port Fittings:

15605 - ORB-08 to AN-06 Flare 15606 - ORB-06 to AN-06 Flare 15607 - ORB-08 to AN-08 Flare 15649 - ORB-06 to AN-08 Flare 15609 - ORB-10 to AN-06 Flare 15610 - ORB-10 to AN-08 Flare 15615 - 3/8-NPT to AN-06 Flare

### Aeromotive Commonly Used Hose-Ends;

15650 - AN-06 Straight Hose End

### Aeromotive Commonly Used SS Braided Fuel Lines;

15701 - AN-06 4' Length 15702 - AN-06 8' Length

15703 - AN-06 12' Length 15704 - AN-08 4' Length 15705 - AN-08 8' Length 15706 - AN-08 12' Length

15711 - AN-08 16' Length

### Aeromotive Replacement Element Part Numbers;

12601 – 10-M Fabric Element (gas)

12650 – 10-M MicroGlass Element (gas, alcohol, E85)

12635 – 40-M SS Element (gas, alcohol, E85) 12604 – 100-m SS Element (gas, alcohol, E85)

12001 - Filter O-Ring, 10-Pack

# **General Installation Cautions and Guidelines:**


- <u>CAUTION</u>: Insure all components are mounted, and fuel lines are routed through the chassis per the diagram, and in a manner to provide maximum clearance from any exhaust system components, especially exhaust headers, turbo charger down-pipes, mufflers and tail-pipes, etc.
- <u>CAUTION</u>: Insure all components are mounted, and fuel lines are routed through the chassis per the diagram, and in a manner to safely clear any suspension components in the vehicle.
- <u>CAUTION</u>: Insure all components are mounted, and all fuel lines are routed, safely through the chassis, per the diagram, and in a manner to safely clear the bell-housing, transmission, and or drive-line.
- <u>CAUTION</u>: Pressurize the fuel system and thoroughly check for fuel leaks, repairing any leaks found first, before cranking and/or starting the engine. Once the engine is

running, again carefully check for fuel leaks, shutting down the vehicle immediately if necessary to perform any required repairs.

- <u>GUIDELINE:</u> Mount the fuel pressure regulator in the engine bay, as close to the fuel rail/carb as possible.
- <u>GUIDELINE</u>: Acquire and install quality AN style hose and hose-ends. Teflon or PTFE based fuel line, though more costly, offers both long service life and resistance to permeation or vapor walk (where fuel vapors can "walk" through the line and contribute fuel smell to the area around where the car is stored).

# STEALTH 340 Single Feed Carb - Return

| ed Forced Induction | 850hp   |
|---------------------|---------|
| Naturally Aspirat   | 1,000hp |
| *flywheel           | GAS     |

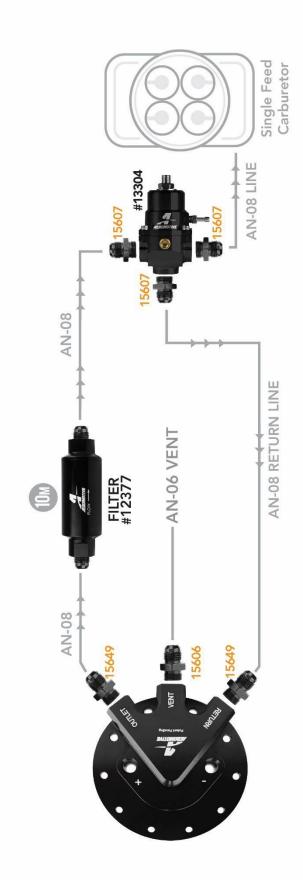

# **Contact Us**

### RGA NUMBER REQUIRED FOR ALL RETURNS TO AEROMOTIVE.

To obtain an RGA number, please call (913) 647–7300 and ask for the Returns and Repairs department or complete the online form under the "Rebuilds" section at <a href="https://www.aeromotiveinc.com">www.aeromotiveinc.com</a>.

### • Shipping & Returns

Aeromotive Inc. 10955 Mill Creek Road Lenexa, KS 66219

General Inquiries and Tech Line: (913) 647-7300

General Email: <a href="mailto:info@aeromotiveinc.com">info@aeromotiveinc.com</a>
Tech Email: <a href="mailto:tech@aeromotiveinc.com">tech@aeromotiveinc.com</a>

The Aeromotive Tech Lines are open Monday through Friday from 9:30AM to 5:00PM Central Standard Time.



**WARNING**: This product can expose you to chemicals, including chromium, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information, visit: <a href="https://www.p65Warnings.ca.gov">www.p65Warnings.ca.gov</a>

## AEROMOTIVE, INC. LIMITED WARRANTY

This Aeromotive Product, with proof of purchase dated on or after January 1, 2003, is warranted to be free from defects in materials and workmanship for a period of one year from the original date of purchase. No warranty claim will be valid without authentic, dated proof of purchase.

This warranty is to the original retail purchaser and none other and is available directly from Aeromotive and not through any point of distribution or purchase.

If a defect is suspected, the retail purchaser must contact Aeromotive directly to discuss the problem, possible solutions and obtain a Return Goods Authorization (RGA), if deemed necessary by the company. Please call 913-647-7300 and dial option 3 for the technical service dept. All returns must be shipped freight pre-paid to the company and with valid RGA before they will be processed.

Aeromotive will examine any product returned with the proper authorization to determine if the failure resulted from a defect or from abuse, improper installation, misapplication or alteration. Aeromotive will then, at it's sole discretion, return, repair or replace the product.

If any Aeromotive product is determined defective, buyer's exclusive remedy is limited in value to the sale price of the good. In no event shall Aeromotive be liable for incidental or consequential damages.

Aeromotive expressly retains the right to make changes and improvements in any product it manufactures and sells at any time. These changes and improvements may be made without notice at any time and without any obligation to change the catalogs or printed materials.

Aeromotive expressly retains the right to discontinue at any time and without notice any Aeromotive product that it manufactures or sells.

This warranty is limited and expressly limits any implied warranty to one year from the date of the original retail purchase on all Aeromotive products.

No person, party or corporate entity other than Aeromotive shall have the right to: determine whether or not this Limited Warranty is applicable to any Aeromotive product, authorize any action whatsoever under the terms and conditions of this Limited Warranty, assume any obligation or liability of any nature whatsoever on behalf of Aeromotive under the terms and conditions of this Limited Warranty.

This Limited Warranty covers only the product itself and not the cost of installation or removal.

This Limited Warranty is in lieu of and expressly excludes any and all other warranties, expressed or implied. This Limited Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.